


PLAY70X3 2.0 SH | P/N: 81401717

Summary

The Magswitch 2.0 LAY-series of magnetic grippers for robotic automation utilize magnets arranged in a linear array to extend the depth and footprint of the magnetic field. The PLAY 70x3 2.0 SH magnets have the added capability of handling high temperature parts. The larger footprint of the array magnets provide stability for large end effectors and workpieces. With the ability to add custom pole shoes, the LAY magnets can be used with many different part profiles. The PLAY 70x3 2.0 SH tools are strong, robust and a perfect high temperature material handling solution for angle iron, welded assemblies, plate steel and long

Specifications

Maximum Breakaway Force ^{1,2,4}	13232	N		
Maximum Shear ^{1,2,4}	3139	N		
Minimum Thickness for De-Stack ³	0.5	in	12.7	mm
Overall Height (Max)	11.8	in	300.5	mm
Overall Length	11.2	in	285.6	mm
Overall Width	4.9	in	125.0	mm
Net Weight	45.19	lbs	20.5	kg
Air Port Threads	Rc 1/4			
Maximum Application Temperature	302	F	150	C
Magnetic Pole Footprint	3.8x10.0	in	97.6x255	mm
Max Allowable Pressure	145	psi	1.00	MPa

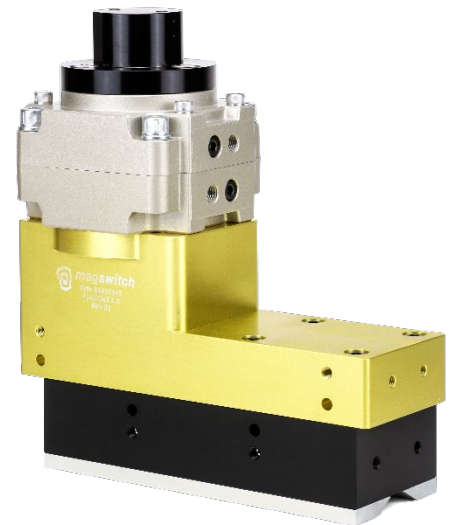

Material Thickness - mm (in)	1.5 (0.059)	1.9 (0.075)	2.7 (0.106)	3 (0.118)	3.5 (0.138)	4.76 (0.187)	6.35 (0.250)	9.53 (0.375)	12.7 (0.500)	19.05 (0.750)	50 (1.969)
Maximum Force ⁵ (N)	1268	1875	2781	3283	3614	5234	7690	10498	11505	13228	13232
Required Air Pressure - bar (psi)	3.4 (50)	3.1 (45)	2.9 (42)	2.9 (42)	2.8 (40)	2.4 (35)	2.4 (35)	2.4 (35)	2.1 (30)	2.1 (30)	2.1 (30)

¹ Determined in laboratory environment on 2" thick SAE1018 Steel with surface roughness 63 micro inches. Many factors contribute to the actual breakaway force and safe working load in each application. Consult a Magswitch Applications Engineer and test the Magswitch in each application before deployment.

² All data applies to standard tool.

³ Determined with SAE1018 Steel L=200mm W=200mm.

⁴ Values may vary by +/- 5%.

⁵ Maximum forces listed above are not safe lifting forces. Designer must take into account safety factor when specifying tool. Magswitch recommends SWL = 5:1 for most applications.



$$SWL \text{ (Safe Working Load)} = \frac{\text{Maximum Force}^5}{\text{Safety Factor} (\geq 5)}$$

Pole shoes required for operation and included in package

Standard kits available:

PSK, PLAY70X3 2.0, STANDARD, HIGH HEAT, NICKEL	88002153
--	----------

WARNING!
Do Not Operate Unless In Contact With Ferrous Target

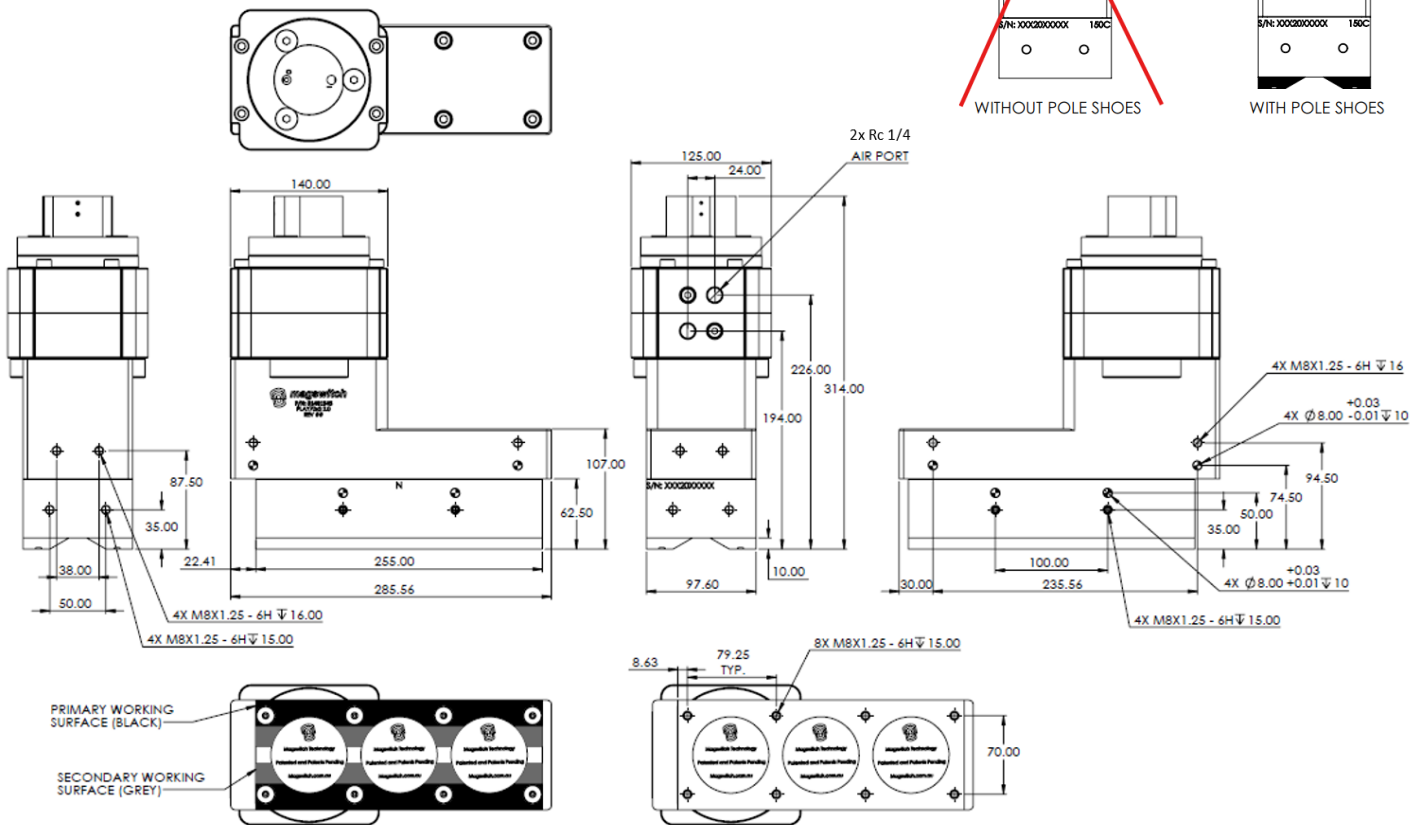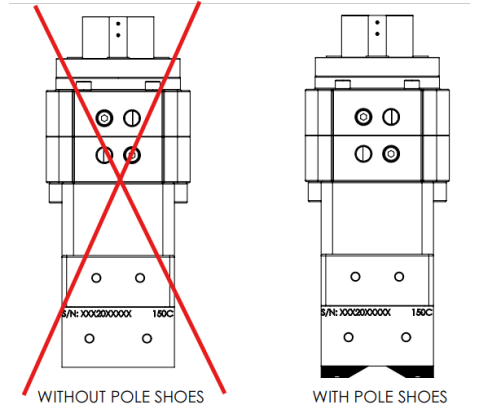



MAGSWITCH PLAY70X3 2.0 SH
P/N: 81401717
+ 1(303) 468.0662
magswitch.com

Center of Mass

