

AR110 | P/N: 8140740

Summary

The Magswitch AR110 is our highest capacity single actuation magnet ideal for the heaviest demand projects. The single sided part holding and compact profile is ideal for bin picking applications and development of a compact end of arm tool design. The AR110 has the deepest magnetic field for air gap penetration on scaly, rough, and forged parts. Magswitch "AR" series is exclusively designed for use with pole shoes. Each Magswitch AR110 unit comes standard with one set of dual-purpose pole shoes for flat or pipe/round stock. Simply flip the pole shoes around so the V shape is exposed for use on pipe and other rounds. Customization of pole shoes is available to obtain optimum performance and holding force for each unique application.



WARNING!

Do Not Operate Unless In Contact With Ferrous Target

Specifications

Nominal Maximum Breakaway Force ^{1,2,4}	12795 N	
Nominal Maximum Shear Force ^{1,2,4}	850 N	
Minimum De-Stack Thickness	1.5 in	38.1 mm
Net Weight (with pole shoes)	68.34 lbs	31 kg
Minimum Actuation Pressure	28 psi	1.9x10 ⁵ pa
Maximum Actuation Pressure	70 psi	4.8x10 ⁵ pa
Air Port Thread	G1/4	
Magnetic Pole Footprint (with pole shoes)	7.5x4.5 in	190x114 mm

Material Thickness	3	4	5	6	7	10	12.7	19.5	25.4	38.1	50.8
- mm (in)	(0.118)	(0.157)	(0.197)	(0.236)	(0.276)	(0.394)	(0.5)	(0.768)	(1.000)	(1.500)	(2.000)
Maximum Force ⁴ - Newton (N)	1839	2803	3481	4255	4858	9797	11738	11800	12369	12667	12795

¹ Determined in laboratory environment on 2" thick SAE1018 Steel with surface roughness 63 micro inches with optimized pole shoes. Many factors contribute to the actual breakaway force and safe working load in each application. Consult a Magswitch Applications Engineer and test the Magswitch in each application before deployment.

² All data applies to unit with flat pole shoes installed.

³ Values may vary by +/- 5%.

⁴ Maximum forces listed above are not safe lifting forces. Designer must take into account safety factor when specifying tool. Magswitch recommends SWL = 5:1 for most applications.



MAGSWITCH AR110


P/N: 8140740
 + 1(303) 468.0662
 magswitch.com

Pole shoes required for operation


Standard Kits Available:

AR110 Standard Pole Shoes Kit	8800364 (included)
AR110 Combo Shoes Kit	8800073


WARNING!
Do Not Operate Unless In Contact With Ferrous Target

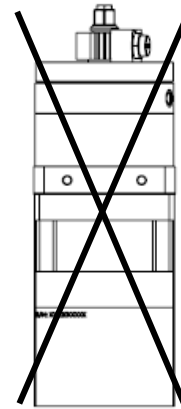


NO POLE SHOES

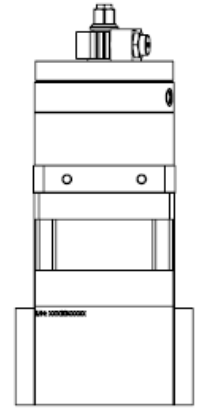

POLE SHOES ATTACHED

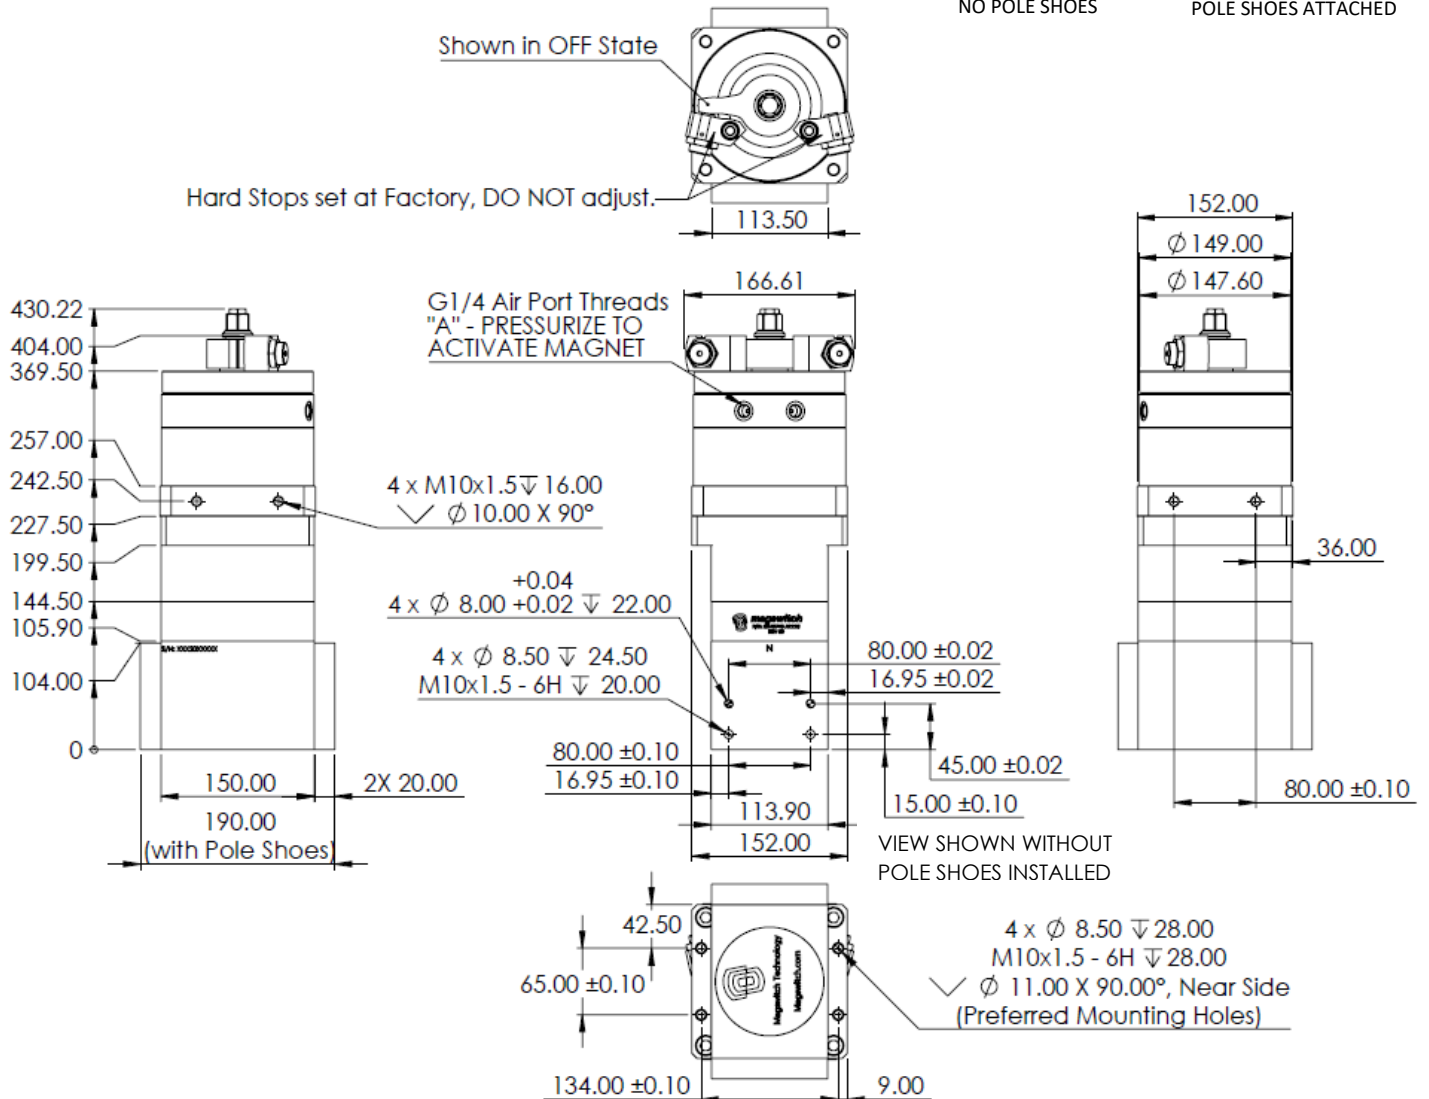

DIMENSIONS ARE IN MILLIMETERS (MM)

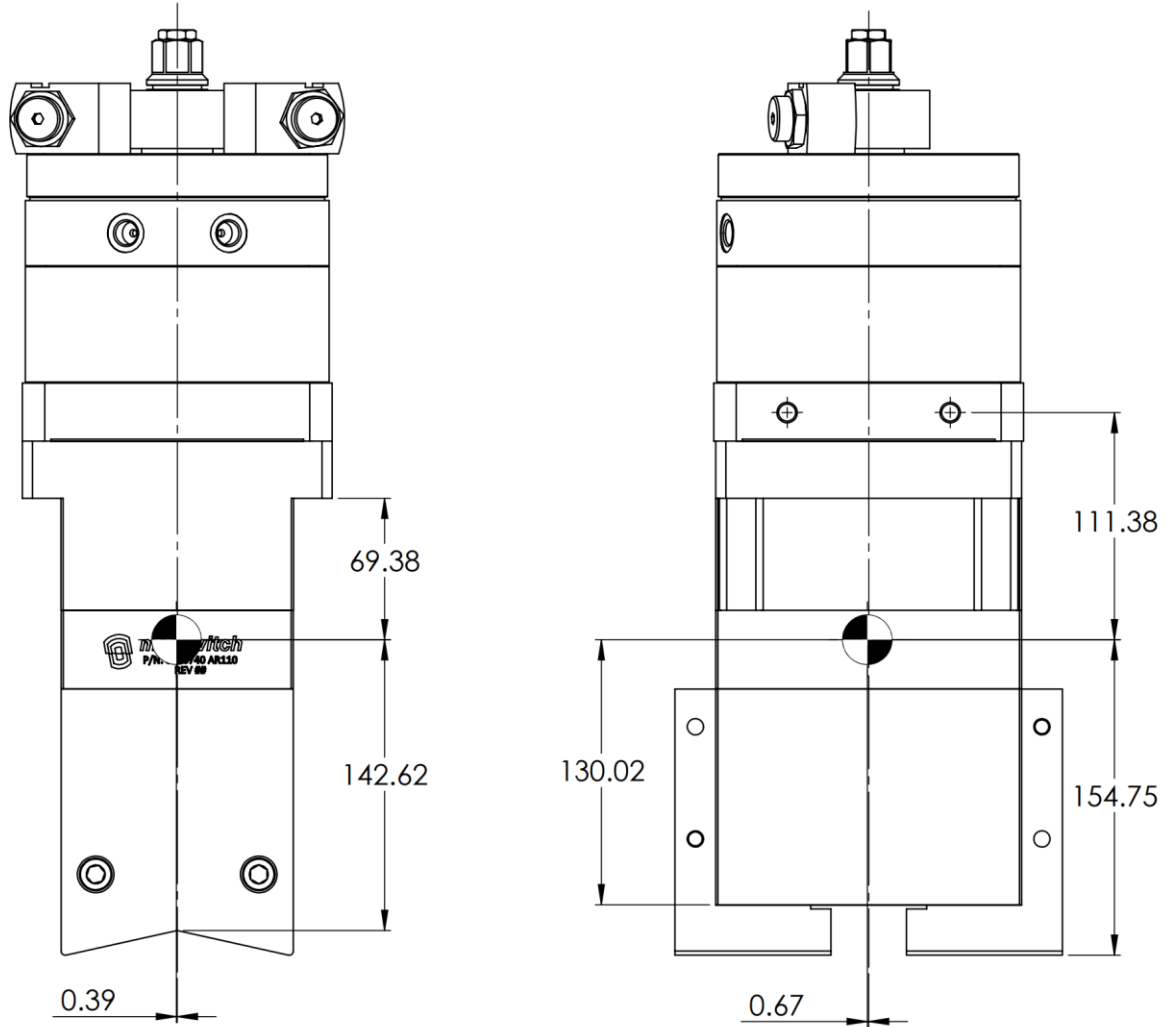Center of Gravity (COG)**DIMENSIONS ARE IN MILLIMETERS (MM)**